


Capacity[Kg]	OIML
75	Yes
100	Yes
200	Yes
300	Yes

TECHNICAL CHARACTERISTICS	
Rated output	2 mV/V
Rated output tolerance	$\leq \pm 0,1\%$
Maximum excitation	15 Vcc/ 15 Vdc
Zero balance	$\leq \pm 1\%$ f.s.
Input resistance	$400 \pm 25$ ohm
Output resistance	$350 \pm 2$ ohm
Insulation resistance	$\geq 2000$ Mohm
Combined error	$\leq \pm 0,04\%$ f.s.
Hysteresis	$\leq \pm 0,02\%$ f.s.
Creep 30'	$\leq \pm 0,035\%$ f.s.
Temperature effect on zero balance	$\leq \pm 0,007\%$ f.s./°C
Temperature effect on rated output	$\leq \pm 0,004\%$ f.s./°C
Compensated temperature range	-10 ÷ +40 °C
Operating temperature range	-30 ÷ +70 °C
Max safe load	150% f.s.
Breaking load	> 300% f.s.
Protection class	IP65
Material	Steel
Standard cable length	5 m
OIML R60 C3 version	On request

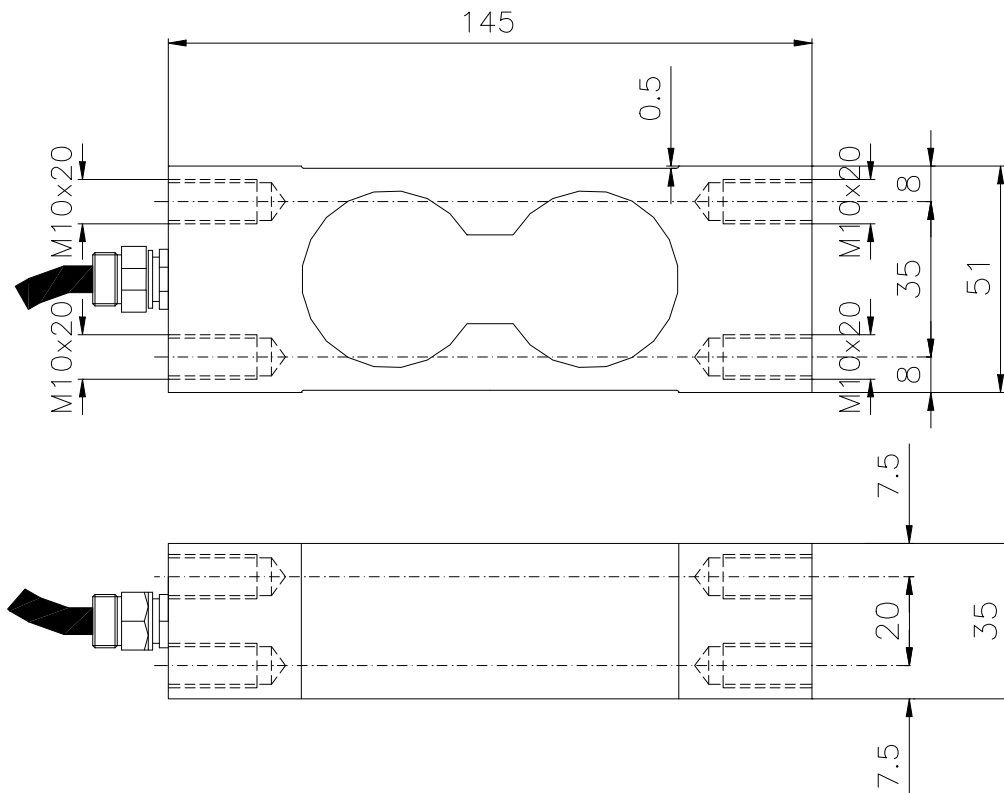

Wiring	
Red	+ Excitation
Blue	- Excitation
Yellow	+ Signal
Green	- Signal
White	+ Reference
Black	- Reference