



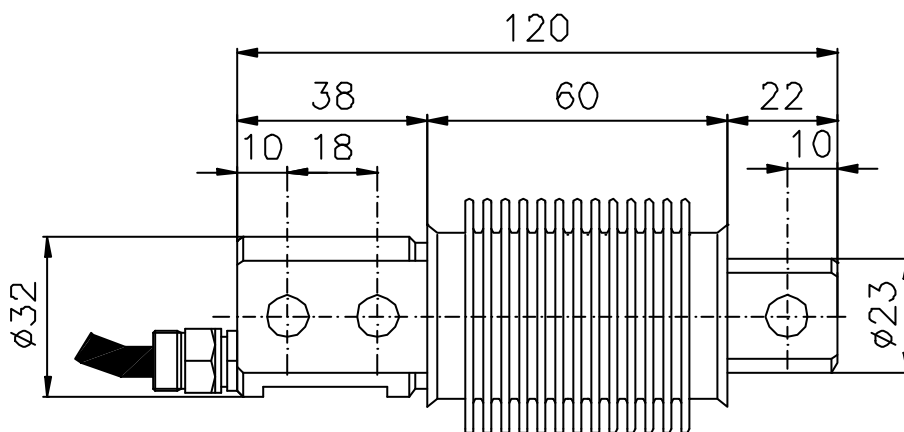

Capacity [Kg]	OIML
10	Yes
20	Yes
25	Yes
50	Yes
100	Yes
200	Yes

TECHNICAL CHARACTERISTICS	
Rated output	2 mV/V
Rated output tolerance	$\leq \pm 0,1\%$
Max excitation	15 Vcc
Zero balance	$\leq \pm 1\%$ f.s.
Input resistance	$400 \pm 20$ ohm
Output resistance	$350 \pm 2$ ohm
Insulation resistance	$\geq 2000$ Mohm
Combined error	$\leq \pm 0,025\%$ f.s.
Hysteresis	$\leq \pm 0,015\%$ f.s.
Creep 30'	$\leq \pm 0,024\%$ f.s.
Temperature effect on zero balance	$\leq \pm 0,005\%$ f.s./°C
Temperature effect on rated output	$\leq \pm 0,002\%$ f.s./°C
Compensated temperature range	-10 ÷ +40 °C
Operating temperature range	-20 ÷ +70 °C
Max safe load	150% f.s.
Breaking load	> 300% f.s.
Protection class	IP67
Material	Stainless steel
Standard cable length	5 m
OIML R60 C3/C4 version	On request

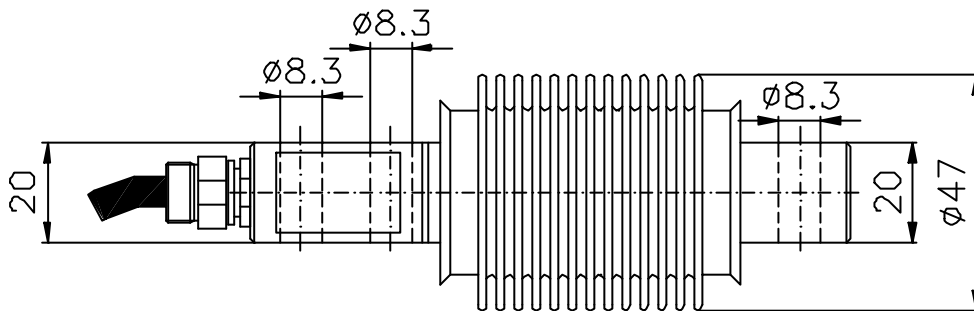

Wiring	
Red	+ Excitation
Blue	- Excitation
Yellow	+ Signal
Green	- Signal
White	+ Reference
Black	- Reference