




TECHNICAL CHARACTERISTICS	
Rated output	0,5 ÷ 1 mV/V
Rated output tolerance	≤ ± 0,1%
Max excitation	15 Vcc
Zero balance	≤ ± 1% f.s.
Input resistance	400/750 ± 25 ohm
Output resistance	350/700 ± 2 ohm
Insulation resistance	≥ 2000 Mohm
Combined error	≤ ± 0,5% f.s.
Hysteresis	≤ ± 1% f.s.
Creep 30'	≤ ± 0,1% f.s.
Temperature effect on zero balance	≤ ± 0,01% f.s./°C
Temperature effect on rated output	≤ ± 0,02% f.s./°C
Compensated temperature range	-10 ÷ +40 °C
Operating temperature range	-30 ÷ +70 °C
Max safe load	2000% f.s.
Breaking load	> 500% f.s.
Protection class	IP65 / IP67
Material	Steel or stainless steel
Standard cable length	5 m

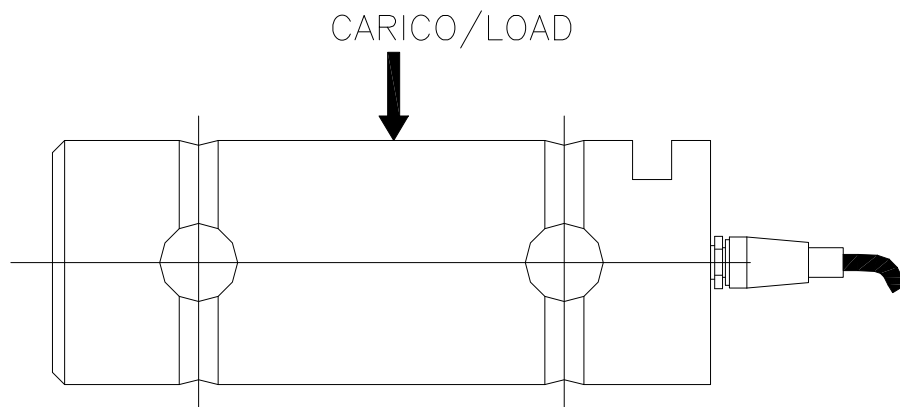

Wiring	
Red	+ Excitation
Blue	- Excitation
Yellow	+ Signal
Green	- Signal
White	+ Reference
Black	- Reference