




**MAIN FEATURES**

Complete group made of load cell and electronic weight indicator, mainly used in laboratory tests.

- Display indications: weight (6 digit)
- Tare zero and weight settings.
- Measuring units selection (kg - t - N - kN).
- Automatic power-off when rising above the range
- Digital filter selection.
- Peak function (it visualizes and hold the maximum weight).
- Automatic transmission via RS232 of the measured weight .
- Selection of the automatic auto-zero at power-on

Accuracy:	± 0,1% fondo scala
Working temperature:	-5 ÷ +55 °C
Power supply:	batteria NiCd 7,2V
Battery life:	20 h
Load cell safe load limit:	200% fondo scala
Breaking load coefficient:	> 5
Protection:	IP55 EN 60529

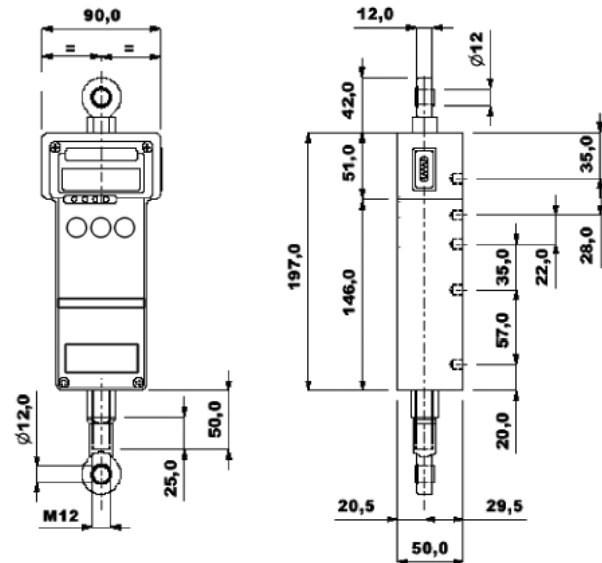

Capacity	Division
kg	g
6	2
15	5
30	10
60	20
150	50
300	100
600	200