




## Model : P1



CAPACITY [kg]	DIMENSIONS [cm]	OPTIONS
3-6-15	23x33x9	◆ Special sizes and capacities upon estimate.
6-15-30	33x33x9	
15-30-60-150	40x40x14	◆ AISI 304 stainless structure
30-60-150	40x50x14 / 50x50x14	◆ OIML version.
60-150-300	50x60x15 / 60x60x15	◆ ATEX certified certified
150-300-600	70x70x16,5	◆ Roller units

**MAIN FEATURES:** Single cell off-center IP65 – Steel tubular structure – Adjustable resting feet and level – Fitted whit satined AISI 304 stainless loading surface – Shielded 3m connection cable.

## Model : P4

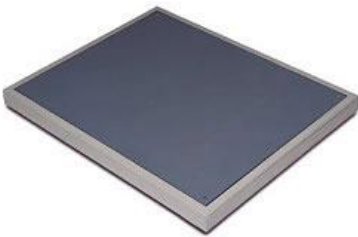

CAPACITY [kg]	DIMENSIONS [cm]	OPTIONS
300-600-1500	100x100x9 100x125x9 125x125x9	◆ Special sizes and capacities upon estimate.
600-1500-3000	125x150x11 150x150x11 150x200x13	◆ Stainless steel surface.
6000	150x200x13	◆ AISI 304 stainless structure
3000-6000-1000	150x250x18 200x250x18	◆ OIML version.
		◆ ATEX certified version
		◆ Frames for flush floor installation.
		◆ Access ramps

**MAIN FEATURES:** Four cells IP68 – Steel tubular bearing structure – Adjustable stainless steel shock-proof jointed feet and level – Removable loading surface made in extra tick chequered galvanized steel – Shielded 5m connection cable.